

SITALI CX 400

Double flow centralised HRV

Compatible with:
SIOS
CONTROL




INTEGRATED PHYSICAL BYPASS

Ideal for "free cooling" operation during the summer



VERTICAL INSTALLATION

Suitable for wall installation in a vertical position.



AUTOMATIC CONTROL

The unit is supplied with a multi-function control panel and LCD display.




FEATURES

- External frame made of pre-coated RAL 9010 galvanized steel.
- Internal structure made of expanded polypropylene to reduce thermal bridges, noise emission and to ensure maximum seal.
- Energy-efficient external rotor EC motors. Featuring thermal protection and mounted on ball bearings for long service life.
- Ultra-quiet and high-performance, balanced centrifugal fan with backward-curved blades coupled directly and dynamically balanced to the motor.
- Cross-flow, counterflow heat exchanger with high efficiency.
- Simplified electrical connection: the unit is supplied pre-wired.
- ISO Coarse 60% (G4) filters easily removable from the outside. The unit is also fitted with an ISO ePM1 60% filter (F7) on the air inlet.
- Automatic frost protection preventing ice formation on the inlet side of the heat exchanger.
- Double condensation drain that can be used based on climatic requirements.
- Left or right configuration for flexible installation

OPERATION

- 3-speed setting.
- Boost function.
- Holiday and Night Mode function.
- Weekly programming.
- Bypass control.
- Air flow balancing.
- Filter maintenance and fault indicator.
- Operating hours counter.
- Settings saving and upload.
- Connection of remote room sensors (humidity, CO2, etc.)
- ModBus interface.
- Connection to electric heating element before and after the ventilation unit.
- Water coil connection for heating.

LAYOUT, DIMENSIONS, WEIGHT

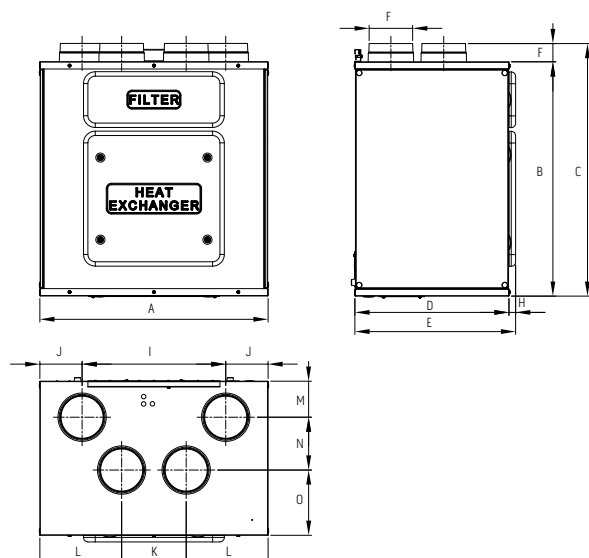


		SITALI CXVA 400
A	mm	778
B	mm	799
C	mm	860
D	mm	525
E	mm	549
F	mm	148
G	mm	62
H	mm	23
I	mm	490
J	mm	144
K	mm	220
L	mm	279
M	mm	1225
N	mm	180
O	mm	222.5
Weight	kg	34,5 kg

TECHNICAL DATA

		SITALI CXVA 400
PRODUCT CODE		99244
EAN CODE		8021183992441
Maximum flow rate @100 Pa	m3/h	363
Electrical power consumption (at the maximum flow rate)	W	160
SEC class (local demand control)		A+
SEC class (central demand control)		A
SEC class (manual control - No demand control ventilation)		A
Thermal efficiency	%	86
Reference flow rate	m3/h	254
Reference pressure difference	Pa	50
Specific power consumption (SPI)	W/m3/h	0.268
Sound power level (LWA)	dB(A)	52
Electrical power supply		220-240V~/50-60Hz
IP protection rating		IPX4
Sound pressure @3m(1)	dB(A)	26
Max room temperature	°C	+40

(1) Sound pressure level at 3m in free field, of the casing, speed 40%, indicated only for comparison purposes.
Energy efficiency classes refer to a range between A+ and G.

SITALI CXVA 400

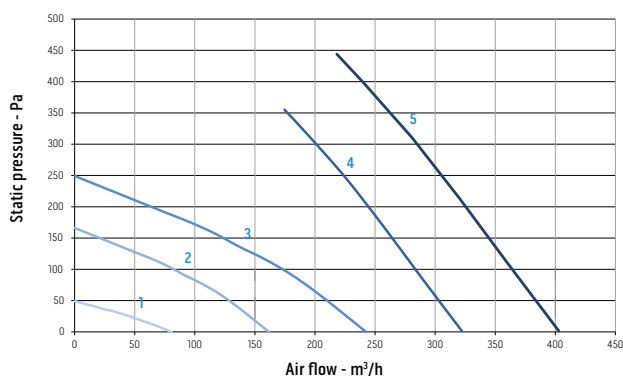

	Speed %	W max	m³/h max
1	20	10	84
2	40	22	162
3	60	48	243
4	80	90	322
5	100	160	403

Inlet curves in accordance with European regulation 1253/2014 (Er P)



1. Air expulsion to exterior
 2. Air inlet from exterior
 3. Air supplied to interior
 4. Air extracted from interior
(Winter condensation drain)
(Summer condensation drain)
- LH flow direction